

DA 5428 W Puristic Arca

Wall ventilation hood

with energy-efficient LED lighting and backlit controls for easy use.



- Distinctive design – 47 1/4 (1198) in (mm) wide stainless steel ventilation hood
- Unique user convenience – Con@ctivity
- Energy-efficient and quiet
- Safe and easy to clean – Miele CleanCover

EAN: 4002516057390 / Material number: 10934860 / Old Material Number: 28542850USA

Construction type	
Wall ventilation hood	•
Operating modes	
Recirculated mode	air extraction
Design	
Color	Stainless steel
RAL colours possible as special order	•
Customization possible on request	•
Variable height available as special order	•
Control panel	
Miele@home	•
Electronic controls	•
Miele@mobile app	•
Power levels (number excl. Intensive)	3
Programmable Intensive switch-off	•
Grease filter saturation indicator	•
Programmable grease filter saturation indicator	•
Acoustic package	•
User convenience	
Run-on time 5/15 min.	•
Cleaning convenience	
Easy-to-clean canopy interior – CleanCover	•
Filter system	
Number of dishwasher safe stainless-steel grease filters (10-ply)	4
Lighting	
LED ClearView lighting	•
Number x W	4 x 3 W
Light intensity in Lx	400 lx
Color temperature in K	3000 Kelvin
Blower	
Dual-action blower	•
AC motor	•
Extraction	
Air throughput	Values upon request
Safety	
Safety shut-off	•
Technical data	
Canopy width in in.(mm)	47 1/4 (1198)
Overall min. height for vented and external in in. (mm)	29 3/8 (745)
Overall max. height for vented and external in in. (mm)	41 5/8 (1055)
Canopy height in in.(mm)	4 3/4 (120)
Overall min. height for recirculation in in. (mm)	34 1/2 (875)
Canopy depth in in.(mm)	20 1/2 (520)
Overall max. height for recirculation in in. (mm)	46 3/4 (1185)
Minimum height above electric hobs in mm	24 1/8 (610)
Minimum height above gas hobs (max. 12.6 kW total power, burner ≤ 4.5 kW) in mm	26 (660)
Net weight in lbs. (kg)	83 (37.5)
Length of electrical wire in ft (m)	2 (0.8)

DA 5428 W Puristic Arca

Wall ventilation hood

with energy-efficient LED lighting and backlit controls for easy use.




EAN: 4002516057390 / Material number: 10934860 / Old Material Number: 28542850USA

Standard plug fitted	•
Total connected load in kW	0.36
Fuse rating in A	15
Voltage in V	120
Frequency in Hz	60
Number of phases	1
Installation notes	
Vent connection at top	•
Vent connection at top and rear	•
Diameter of vent connection in in. (mm)	6 (150)
Telescopic chimney	•
Accessories supplied	
Reducer from 150 to 125 mm Ø	•
Optional accessories	
OdorFree charcoal filter	No

DA 5428 W Puristic Arca

Wall ventilation hood

with energy-efficient LED lighting and backlit controls for easy use.

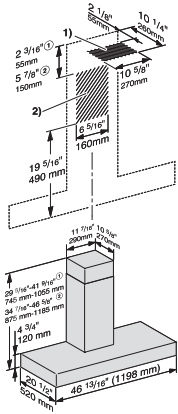

DA 5428 W(Installation drawing)

1) and 2) Shaded area for vent cut-out