

DGC 7570

30" Compact Combi-Steam Oven XL

for steam cooking, baking, roasting with roast probe + menu cooking.



- Touch display with proximity sensor – M Touch S + MotionReact
- Perfect results – DualSteam technology
- Crispy on the outside, succulent on the inside – Combi-Steam
- Miele@home – network-enabled WiFi appliance + Miele Mix & Match
- Easy cleaning – PerfectClean stainless steel oven compartment

EAN: 4002516487838 / Material number: 11875790 / Old Material Number: 23757042USA

| Construction type and design                                     |                      |
|------------------------------------------------------------------|----------------------|
| Combi-Steam Ovens                                                | •                    |
| Combination steam oven                                           | •                    |
| ContourLine                                                      | •                    |
| Appliance color                                                  | Edelstahl/CleanSteel |
| Appliance color                                                  | Clean Touch Steel    |
| Convenience features                                             |                      |
| Rapid PreHeat                                                    | •                    |
| Preheating                                                       | •                    |
| External steam generation                                        | •                    |
| Climate sensor                                                   | •                    |
| Individual humidity settings in combination cooking              | •                    |
| Menu cooking without transfer of taste                           | •                    |
| Miele Mix & Match                                                | •                    |
| Roast probe                                                      | con cable            |
| Roast probe                                                      | With cable           |
| Automatic programs with individual setting of the cooking result | •                    |
| Keep-warm function                                               | •                    |
| Crisp function                                                   | •                    |
| Operating modes                                                  |                      |
| Defrost                                                          | •                    |
| MasterChef automatic programs                                    | •                    |
| Country-specific automatic programs                              | •                    |
| Combi cooking                                                    | •                    |
| Combi Steam with Convection Bake                                 | •                    |
| Combi Steam with Surround                                        | •                    |
| Combi Steam with Maxi Broil                                      | •                    |
| Steam cooking                                                    | •                    |
| Sous-vide                                                        | •                    |
| Reheating                                                        | •                    |
| Roast with moisture                                              | •                    |
| Broiling operating modes                                         | •                    |
| Maxi Broil                                                       | •                    |
| Broil                                                            | •                    |
| Convection Bake                                                  | •                    |
| Convection Roast                                                 | •                    |
| Intensive Bake                                                   | •                    |
| Cake plus                                                        | •                    |
| Surround                                                         | •                    |
| Browning                                                         | •                    |
| Bake                                                             | •                    |
| Convection Roast                                                 | •                    |
| Warm-up cookware                                                 | •                    |
| Special modes                                                    | •                    |
| User convenience                                                 |                      |
| Networking with Miele@home                                       | •                    |
| Display                                                          | M Touch S            |
| Display                                                          | M Touch S            |
| Clear text on control panel                                      | •                    |

DGC 7570

30" Compact Combi-Steam Oven XL

for steam cooking, baking, roasting with roast probe + menu cooking.



EAN: 4002516487838 / Material number: 11875790 / Old Material Number: 23757042USA

|                                                                                  |     |
|----------------------------------------------------------------------------------|-----|
| MotionReact: Light comes on when movement is detected                            | •   |
| MotionReact: Display comes on when movement is detected                          | •   |
| MotionReact: Audible signal to acknowledge when movement is detected             | •   |
| MotionReact: Detection of cabinet fronts                                         | •   |
| SoftOpen                                                                         | •   |
| SoftClose                                                                        | •   |
| ComfortSwivel handle                                                             | •   |
| MultiLingua                                                                      | •   |
| MyMiele                                                                          | •   |
| Show me how                                                                      | •   |
| Motorized lift-up control panel with SoftClose                                   | •   |
| Quantity-independent cooking                                                     | •   |
| Steam cooking on up to 3 levels at the same time                                 | •   |
| Automatic menu cooking                                                           | •   |
| Steam reduction before end of programme                                          | •   |
| Timers                                                                           | •   |
| Time of day display                                                              | •   |
| Date display                                                                     | •   |
| Minute minder                                                                    | •   |
| Programming start of cooking duration                                            | •   |
| Programming end of cooking duration                                              | •   |
| Programmable cooking time                                                        | •   |
| Actual temperature display                                                       | •   |
| Desired temperature display                                                      | •   |
| Audible signal when desired temperature is reached                               | •   |
| Default temperature                                                              | •   |
| Favorites                                                                        | •   |
| Sabbath program                                                                  | •   |
| Individual settings                                                              | •   |
| MotionReact DG                                                                   | •   |
| <b>Cleaning convenience</b>                                                      |     |
| Clean Touch Steel surface                                                        | •   |
| Stainless-steel cavity with linen surface structure                              | •   |
| Foldable broil heater element                                                    | •   |
| External steam generator                                                         | •   |
| Maintenance programs                                                             | •   |
| Soak program                                                                     | •   |
| Rinse program                                                                    | •   |
| Cavity drying program                                                            | •   |
| Quick-release side racks                                                         | •   |
| Removable side racks                                                             | •   |
| Automatic descaling                                                              | •   |
| Descaling                                                                        | •   |
| CleanGlass door                                                                  | •   |
| <b>Steam technology and Water supply</b>                                         |     |
| MultiSteam                                                                       | •   |
| Fresh water container volume in l                                                | 1.4 |
| Fresh-water container tank behind motorized lift-up control panel with SoftClose | •   |

DGC 7570

30" Compact Combi-Steam Oven XL

for steam cooking, baking, roasting with roast probe + menu cooking.

EAN: 4002516487838 / Material number: 11875790 / Old Material Number: 23757042USA

|                                                                            |                |
|----------------------------------------------------------------------------|----------------|
| Condensate container behind motorized lift-up control panel with SoftClose | •              |
| Drain filter                                                               | •              |
| <b>Safety</b>                                                              |                |
| Appliance cooling system and cool touch front                              | •              |
| Safety cut-out                                                             | •              |
| System lock                                                                | •              |
| Vapor cooling system                                                       | •              |
| Sensor lock                                                                | •              |
| <b>Technical data</b>                                                      |                |
| No. of rack levels                                                         | 3              |
| Labeling of rack levels                                                    | •              |
| Door hinge side                                                            | Bottom         |
| Door hinge side                                                            | unten          |
| Oven interior lighting                                                     | BrilliantLight |
| Niche width min. in inches (mm)                                            | 28 5/8 (724)   |
| Niche width min. in inches (mm)                                            | 724            |
| Niche width max. in inches (mm)                                            | 28 5/8 (724)   |
| Niche width max. in inches (mm)                                            | 724            |
| Niche height min. in inches (mm)                                           | 18 5/8 (470)   |
| Niche height min. in inches (mm)                                           | 470            |
| Niche height max. in inches (mm)                                           | 18 5/8 (472)   |
| Niche height max. in inches (mm)                                           | 472            |
| Niche depth in in. (mm)                                                    | 610            |
| Niche depth in in. (mm)                                                    | 24 1/8 (610)   |
| Appliance width in in. (mm)                                                | 29 7/8 (757)   |
| Appliance width in in. (mm)                                                | 757            |
| Appliance height in in. (mm)                                               | 18 7/8 (479)   |
| Appliance height in in. (mm)                                               | 479            |
| Appliance depth in in. (mm)                                                | 22 5/8 (573)   |
| Appliance depth in in. (mm)                                                | 573            |
| Weight in lbs. (kg)                                                        | 44.85          |
| Weight in lbs. (kg)                                                        | 99 (44.9)      |
| Total connected load in kW                                                 | 2.80-3.70      |
| Power Rating in V                                                          | 0              |
| Usable voltage range in V                                                  | 240/208        |
| Frequency in Hz                                                            | 60             |
| Number of phases                                                           | 2              |
| Fuse rating in A                                                           | 20             |
| Connection wire with plug                                                  | •              |
| Length of power cord in in. (m)                                            | 2              |
| Replacing bulbs                                                            | Kundendienst   |
| <b>Accessories supplied</b>                                                |                |
| PerfectClean universal baking tray                                         | 1              |
| PerfectClean baking and roasting rack                                      | 1              |
| FlexiClip telescopic runners with PerfectClean (pair)                      | 1              |
| Removable side racks with PerfectClean (pair)                              | 1              |
| Perforated stainless-steel cooking container                               | 1              |
| Unperforated stainless-steel cooking containers                            | 1              |
| Descaling tablets                                                          | 2              |

DGC 7570  
30" Compact Combi-Steam Oven XL  
for steam cooking, baking, roasting with roast probe + menu cooking.




EAN: 4002516487838 / Material number: 11875790 / Old Material Number: 23757042USA

| Available display languages                 |                                                                                                                                                                                                                                                 |
|---------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Available display languages via MultiLingua | bahasa malaysia, dansk, deutsch, english, español, français, hrvatski, italiano, magyar, nederland, norsk, polski, portugês, русский, română, slovenčina, slovenščina, srpski, suomi, svenska, türkçe, українська, čeština, ελληνικά, , , , , , |

## DGC 7570


### 30" Compact Combi-Steam Oven XL

for steam cooking, baking, roasting with roast probe + menu cooking.

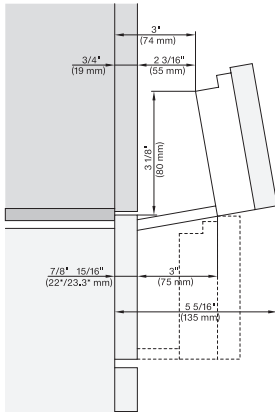


DGC 6x0x-1 + EBA 6808, DGC 6x6x (AM) + EBA 6808, DGC 7xxx(EBA 784/68) installation drawing, Flush inset, NA

7/8" – 22" mm – Glas, 15/16" – 23.3" mm – Edelstahl

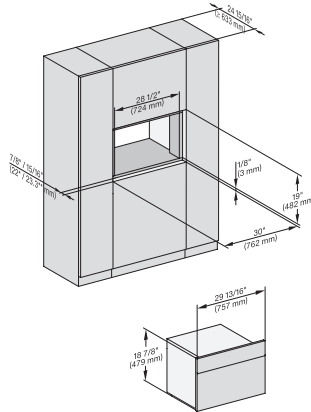


H 6x70 BM, DGC 7xxx, H 7xxx fitting, installation drawing, Flush inset, NA

7/8" – 22" mm – Glas, 15/16" – 23.3" mm – Edelstahl

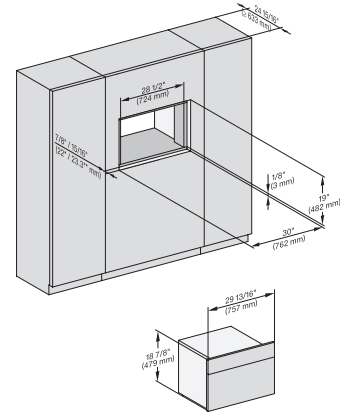


H 6x70 BM, DGC 7xxx, H 7xxx, H68xx fitting wide front, installation drawing, Flush inset, NA

7/8" – 22" mm – Glas, 15/16" – 23.3" mm – Edelstahl

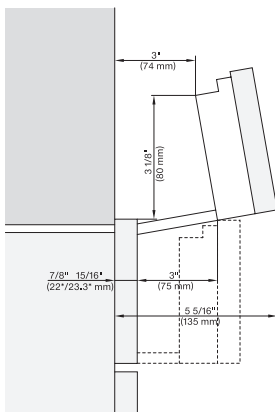


DGC 6x0x-1 + EBA 6808, DGC 6x6x (AM) + EBA 6808, DGC 7xxx(X) + EBA 784/68 installation drawing, Proud, NA

7/8" – 22" mm – Glas, 15/16" – 23.3" mm – Edelstahl

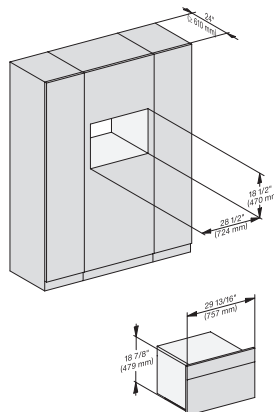


H 6x70 BM, H7x70BM, DGC7x7x(X), fitting, installation drawing, Proud, NA

7/8" – 22" mm – Glas, 15/16" – 23.3" mm – Edelstahl

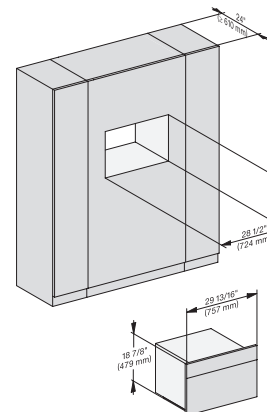


H 6x70 BM, DGC7x7x(X) fitting wide front, installation drawing, Proud, NA

7/8" – 22" mm – Glas, 15/16" – 23.3" mm – Edelstahl

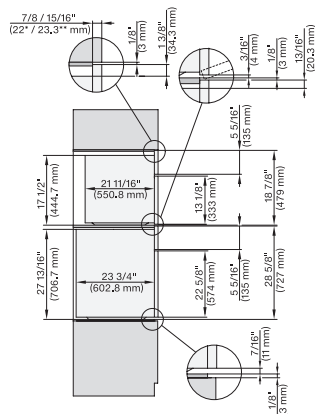


H 6x80 BP, H 6x70 BM, H 6x80-2BP, DGC 7x7x, H 7xxx Combi, installation drawing, Flush inset, NA

7/8" – 22" mm – Glas, 15/16" – 23.3" mm – Edelstahl

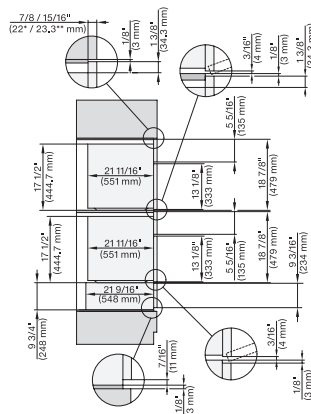

H 6x70 BM, ESW 6x85, DGC7xxx, H7x7x, ESW 7x70 Combi, installation drawing, Flush inset, Flush inset, NA

7/8" – 22" mm – Glas, 15/16" – 23.3" mm – Edelstahl

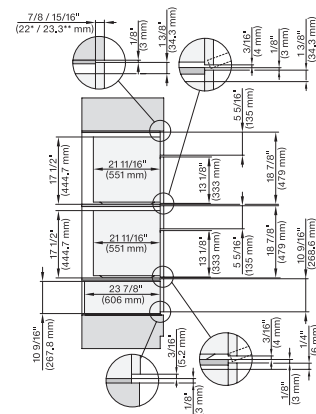


H 6x70 BM, ESW 6x80, DGC7xxx, H7x70, ESW 7x80 Combi, installation drawing, Flush inset, Flush inset, NA

7/8" – 22" mm – Glas, 15/16" – 23.3" mm – Edelstahl

## DGC 7570


### 30" Compact Combi-Steam Oven XL

for steam cooking, baking, roasting with roast probe + menu cooking.

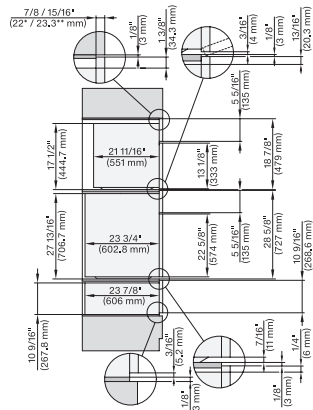


H 6x80 BP, H 6x70 BM, ESW 6x80, H 6x80-2BP, DGC7xxx, H 7xxx, ESW7x80 Combi, Installation drawing, Flush inset, NA


7/8" – 22" mm – Glas, 15/16" – 23.3" mm – Edelstahl

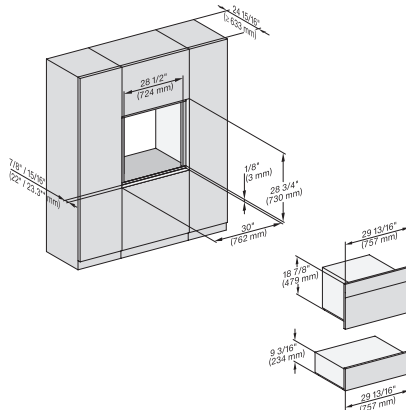


H 6x70 BM, ESW 6x85, DGC7x7x, H7x7x, Exx7x70 Fitting Combi, Installation drawing, Flush inset, NA

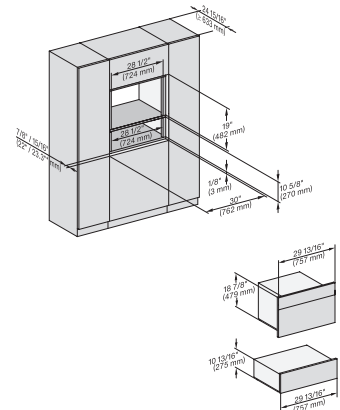


H 6x70 BM, ESW 6x80, DGC7x7x, H7x7x, ESW7x80 Fitting Combi, Installation drawing, Flush inset, NA

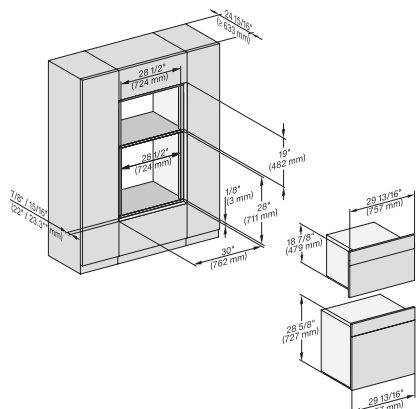


H 6x80 BP, H 6x70 BM, H 6x80-2BP, DGC7x7x, H7xxx Fitting Combi, Installation drawing, Flush inset, NA

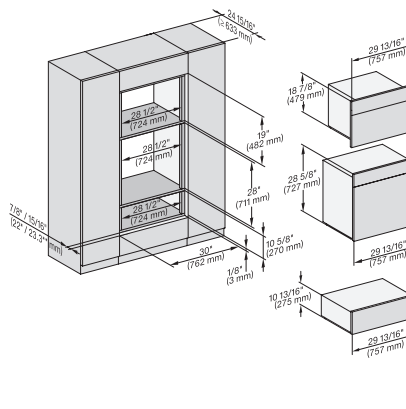


H 6x80 BP, H 6x70 BM, ESW 6x80, H 6x80-2BP, DGC7xxx, H7xxxBM/BMX/BP/BPX, H2x80BP, ESW7x80, Installation drawing, NA

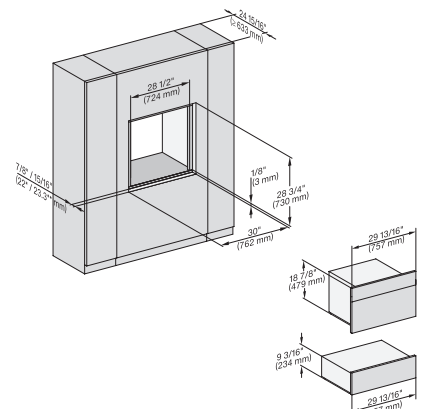


H 6x70 BM, ESW 6x85, DGC 7xxx, H7x70 BM/BMX, ESW 7x70, EVS 7670, Installation drawing, Flush inset, NA

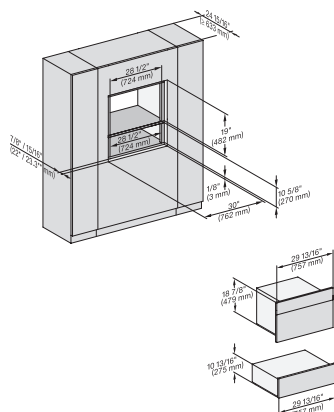

H 6x70 BM, ESW 6x80, DGC7x7x, H7x70 BM/BMX, ESW 7x80 Fitting Combi wide front, Installation drawing, Flush inset, NA

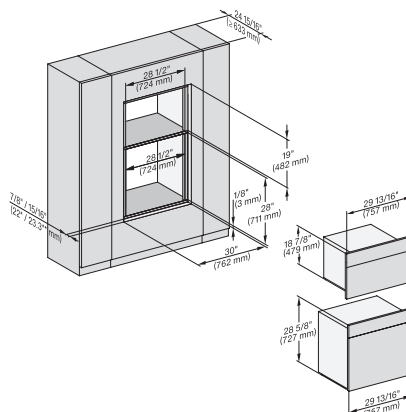

H 6x80 BP, H 6x70 BM, H 6x80-2BP, DGC 7x7x, H7xxx x BM/BP/BPX, H 2880 PB, Installation drawing, Flush inset, NA

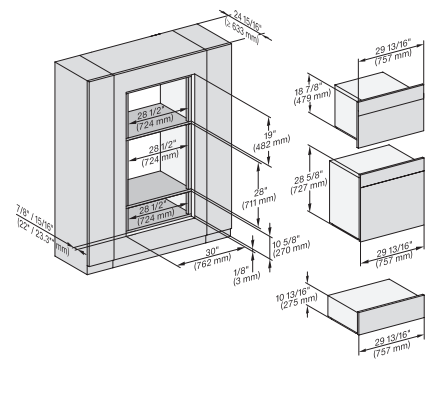


H 6x80 BP, H 6x70 BM, ESW 6x80, H 6x80-2BP, DGC7x7x, H7xxxBM/BMX/BP, H2xxxBP, ESW7xxx, NA

## DGC 7570


### 30" Compact Combi-Steam Oven XL

for steam cooking, baking, roasting with roast probe + menu cooking.

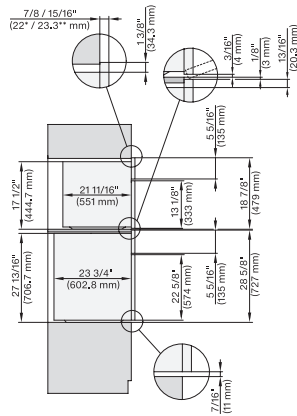


H 6x80 BP, H 6x70 BM, H 6x80-2BP, DGC7x7x,  
H7x70BM, H7x80BPX, Combi, Installation drawing, Proud,  
NA

7/8" – 22" mm – Glas, 15/16" – 23.3\*\* mm – Edelstahl

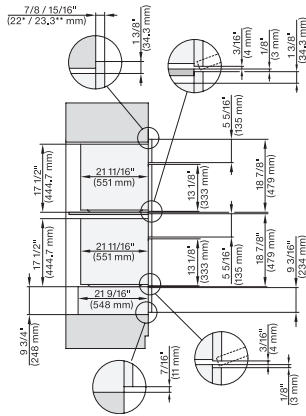


H6x70BM, ESW6x85, DGC7x7x, H7x70BM, ESW7x70,  
EVS7670,Combi, Installation drawing, Proud, Flush inset,  
NA

7/8" – 22" mm – Glas, 15/16" – 23.3\*\* mm – Edelstahl

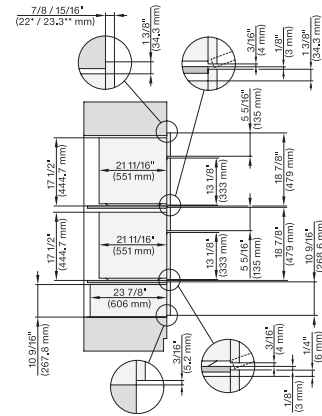


H6x70BM, ESW6x80, DGC7x7x(X), H7x70BM, ESW7x80,  
Combi, Installation drawing, Proud, Flush inset, NA

7/8" – 22" mm – Glas, 15/16" – 23.3\*\* mm – Edelstahl

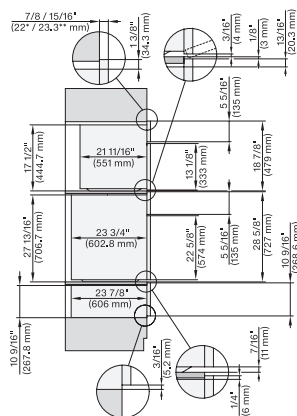


H6x80(2)BP, H6x70BM, ESW6x80, DGC7x7x(X),  
H7x70BM(X), H7x80BP, ESW7x80, Combi, Installation  
drawing, Proud, Flush inset,


7/8" – 22" mm – Glas, 15/16" – 23.3\*\* mm – Edelstahl

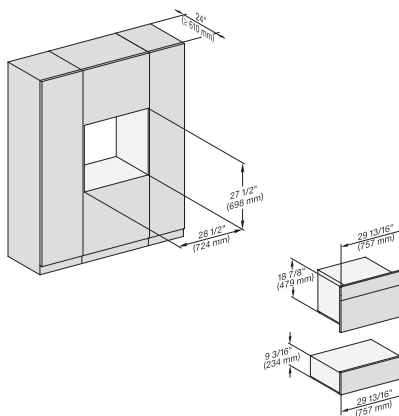


H6x70BM, ESW6x85, DGC7x7x, H7x70BMX, ESW7x70,  
EVS7x70, Fitting Combi, Installation drawing, Proud, NA

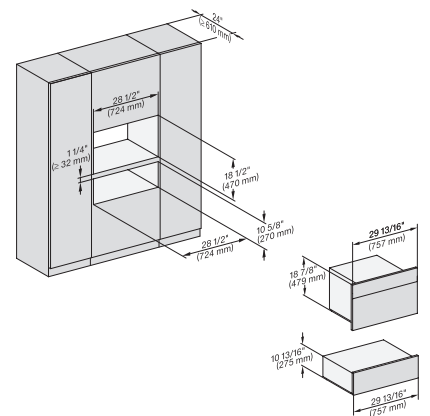

H 6x70 BM, ESW 6x80, DGC7x70X, H7x70BM, ESW7x80,  
Fitting Combi, Installation drawing, Proud, NA

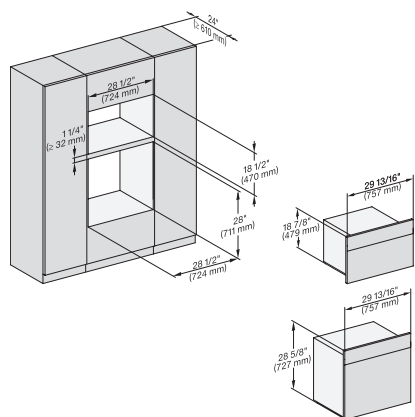


H6x80BP, H6x70BM, H6x80-2BP, DGC7x7x, H7x70BM,  
H2x80BP, H7x80BP(X), Fitting Combi, Installation drawing,  
Proud, NA

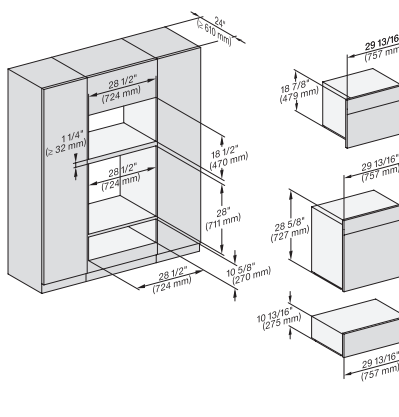

H 6x80 BP, H 6x70 BM, ESW 6x80, H 6x80-2BP,  
NA7000 Fitting Combi, Installation drawing, Proud, NA

<https://miele-mms.de.miele.net/mms/admin/forward.php#>

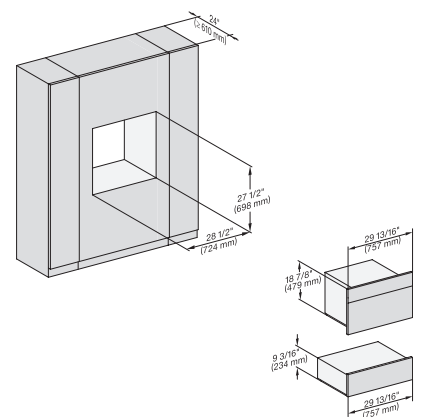


H6x70BM, ESW6x85, DGC7x7x(X), H7x70BM(X),  
ESW7x70, EVS7670, , Fitting Combi wide front, Installation  
drawing, Proud, NA


## DGC 7570

### 30" Compact Combi-Steam Oven XL


for steam cooking, baking, roasting with roast probe + menu cooking.

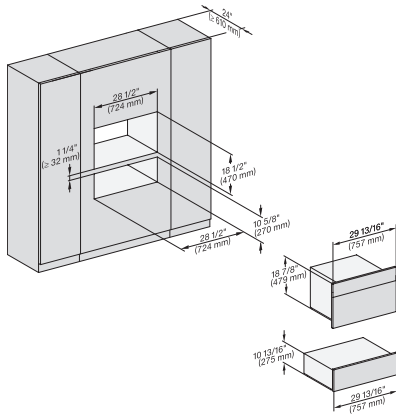


H6x70BM, ESW6x80, DGC7x7x(X), H7x70BM(X), ESW7x80, Fitting Combi wide front, Installation drawing, Proud, NA

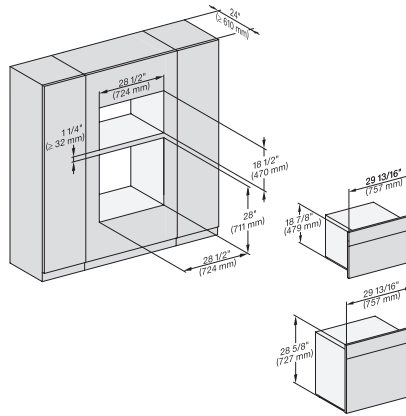

H6x80BP, H 6x70 BM, H 6x80-2BP, NA7000 Fitting Combi wide front, Installation drawing, Proud, NA

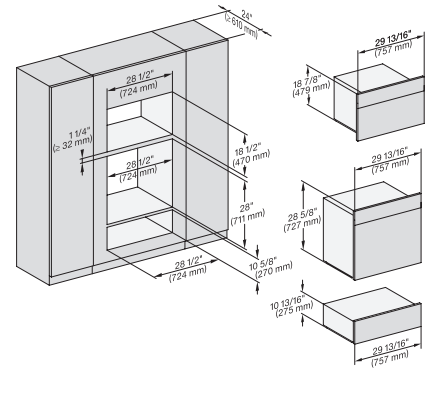


H 6x80 BP, H 6x70 BM, ESW 6x80, H 6x80-2BP, NA7000, Fitting Combi wide front, Installation drawing, Proud, NA

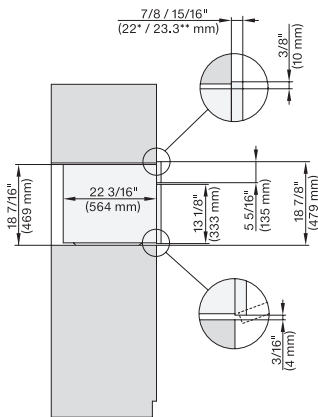


DGC7x7x, side view, 30 Zoll, Proud

7/8" – 22" mm – Glass, 15/16" – 23.3\*\* mm – Stainless steel

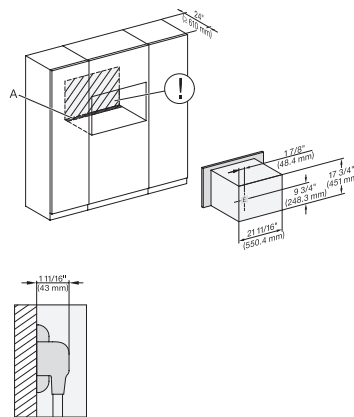

DGC7x7x(X), Installation, 30 Zoll, Proud, XL,

A – Cut-out (4" x 28" / 100 mm x 720 mm) in the bottom of the cabinet for power cord and ventilation, – Electrical and water supplies are recommended to be placed in adjacent cabinetry., Additional cabinet depth is required when placing the electrical and water supplies behind the appliance., E = Electric connection

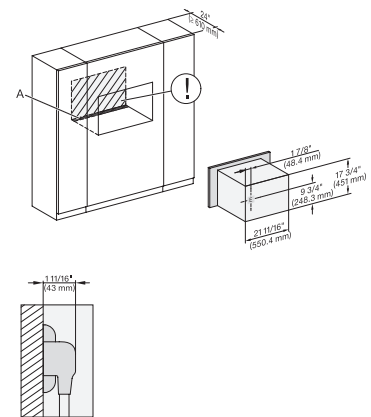


DGC7x7x(X), Installation, 30 Zoll, Proud, wide front, XL,

A – Cut-out (4" x 28" / 100 mm x 720 mm) in the bottom of the cabinet for power cord and ventilation, – Electrical and water supplies are recommended to be placed in adjacent cabinetry., Additional cabinet depth is required when placing the electrical and water supplies behind the appliance., E = Electric connection

## DGC 7570


### 30" Compact Combi-Steam Oven XL

for steam cooking, baking, roasting with roast probe + menu cooking.

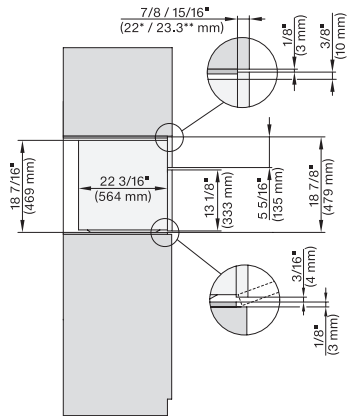


DGC7x7(X), side view, 30 Zoll, Flush inset, XL

7/8" – 22" mm – Glass, 15/16" – 23.3" mm – Stainless steel

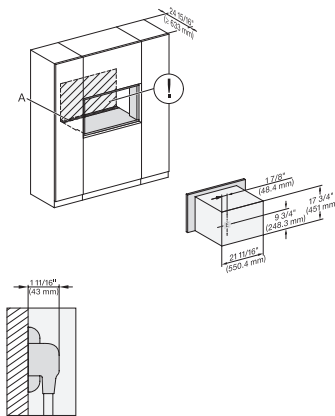


DGC7x7(X), Installation, 30 Zoll, Flush inset

A – Cut-out (4" x 28" / 100 mm x 720 mm) in the bottom of the cabinet for power cord and ventilation, – Electrical and water supplies are recommended to be placed in adjacent cabinetry., Additional cabinet depth is required when placing the electrical and water supplies behind the appliance., E = Electric connection

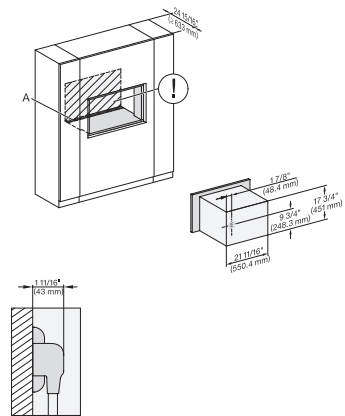


DGC7x7(X), Installation, 30 Zoll, Flush inset, wide front, XL

A – Cut-out (4" x 28" / 100 mm x 720 mm) in the bottom of the cabinet for power cord and ventilation, – Electrical and water supplies are recommended to be placed in adjacent cabinetry., Additional cabinet depth is required when placing the electrical and water supplies behind the appliance., E = Electric connection

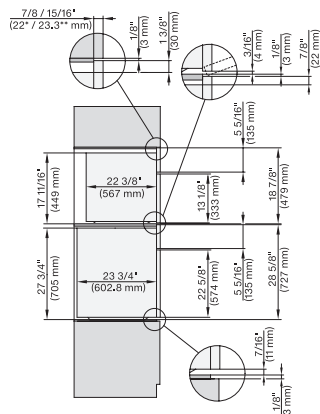


DGC7x7(X), H7x8(X)BP, side view, 30 Zoll, Flush inset, combi, XL, 650

7/8" – 22" mm – Glass, 15/16" – 23.3" mm – Stainless steel

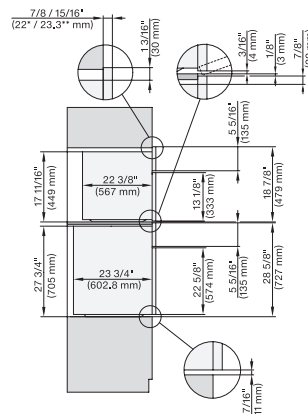

DGC7xxx, H2x80BP, H7x8(X)BP(X), side view, 30 Zoll, Proud, combi, XL, 650

7/8" – 22" mm – Glass, 15/16" – 23.3" mm – Stainless steel

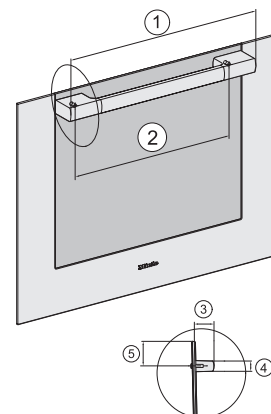

Handle 30" DGC73xx, DGC75xx, DGC77xx, H71xx, H75xx, H77xx, ContourLine – NA7000 - Installation drawing

21 1/8" / 536 mm, 17 1/2" / 444 mm, 2 1/2" / 64 mm, 1 3/8" / 35 mm, 1 7/16" / 37 mm