

Fully Integrated 36" Freezer

F 1913 Vi / F 1903 Vi




Fully Integrated 36" Freezer

F 1913 Vi / F 1903 Vi



FOR FLUSH INSTALLATION

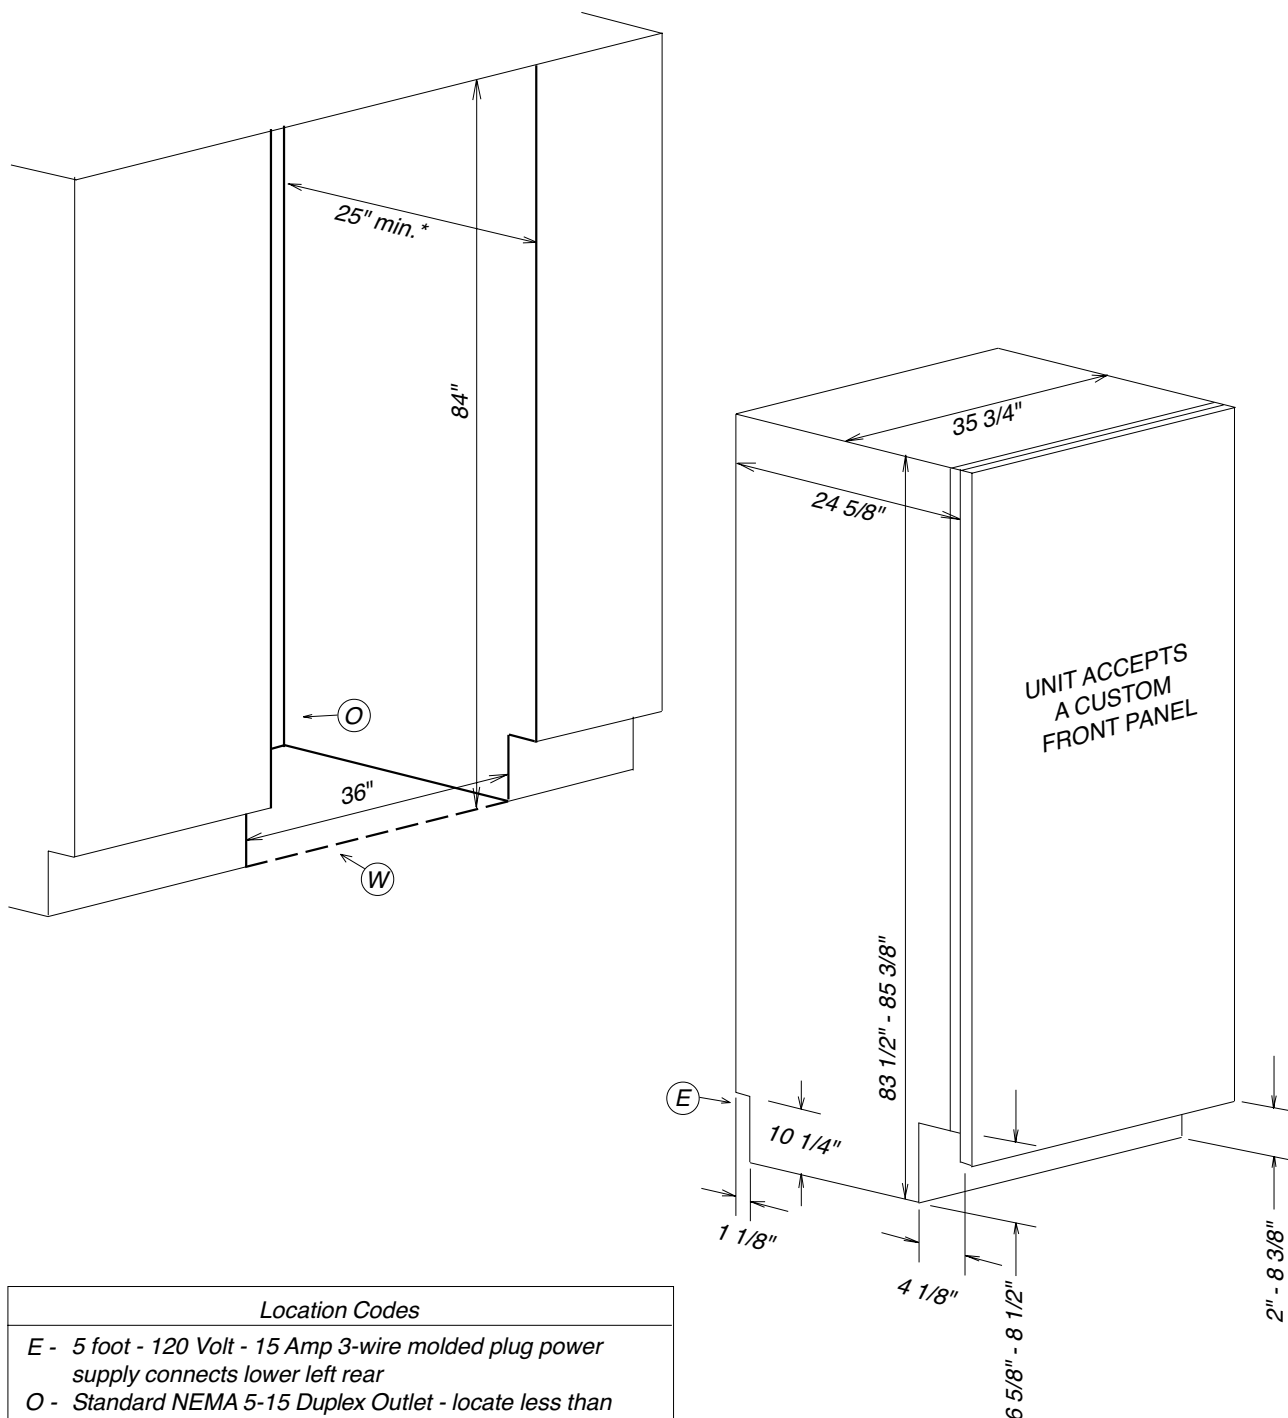

Location Codes
<i>E - 5 foot - 120 Volt - 15 Amp 3-wire molded plug power supply connects lower left rear</i>
<i>O - Standard NEMA 5-15 Duplex Outlet - locate less than 9\"</i>
<i>W - 1/4\" flexible water line - tape to floor</i>
Notes
• All Installations must be done in accordance with local codes • Sides of adjoining cabinets should be filled (flush to frame) to insure proper fit and finish • For Proud Installation - please adjust accordingly

* Depth assumes a 3/4\" panel, please adjust according to custom panel thickness

Fully Integrated 36" Freezer


F 1913 Vi / F 1903 Vi



CUSTOM PANEL INSTALLATIONS

These units do not come equipped with a front panel. They are designed to accept a custom door panel supplied by the cabinet maker. Miele has a unique panel integration system which allows the panels to align with the surrounding cabinets.

Panel size is determined in the following manner:

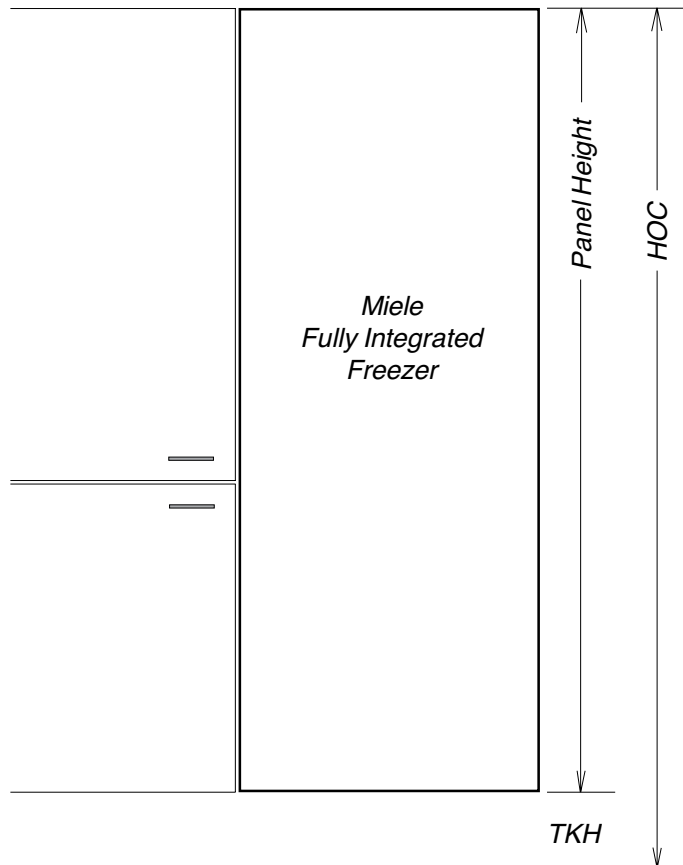

Width: 35 3/4" in all cases

Thickness: Minimum 3/4" outside frame

Height: Determined using the following calculation:

$$\text{Panel Height} = \text{HOC} - \text{TKH}$$

HOC = Total height of cabinet or side panel


TKH = Toe-kick height

Note: Finish back side of panels to insure appearance
Panel may extend above unit. This is **not** considered in height calculation

Maximum panel weight: 79.4 Pounds

Panel Notes

If the adjoining cabinets are taller than the height of machine (HOM) - the front panel may be extended accordingly. Simply maintain the toekick height and extend the panel the needed distance.

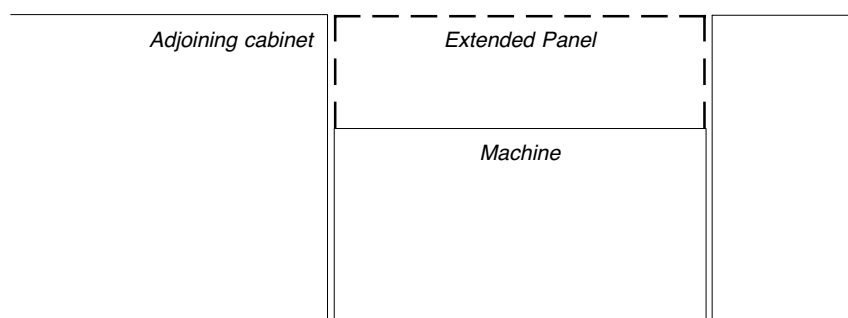


Fully Integrated 36" Freezer F 1913 Vi / F 1903 Vi




HINGING DETAILS

90° Door

Thickness options

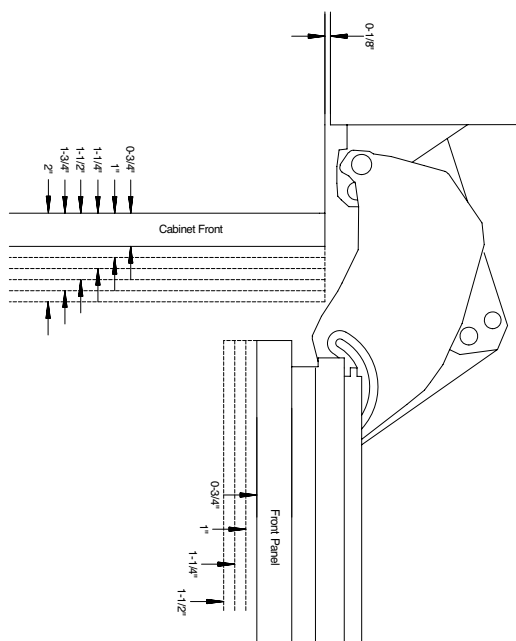


Door Swing

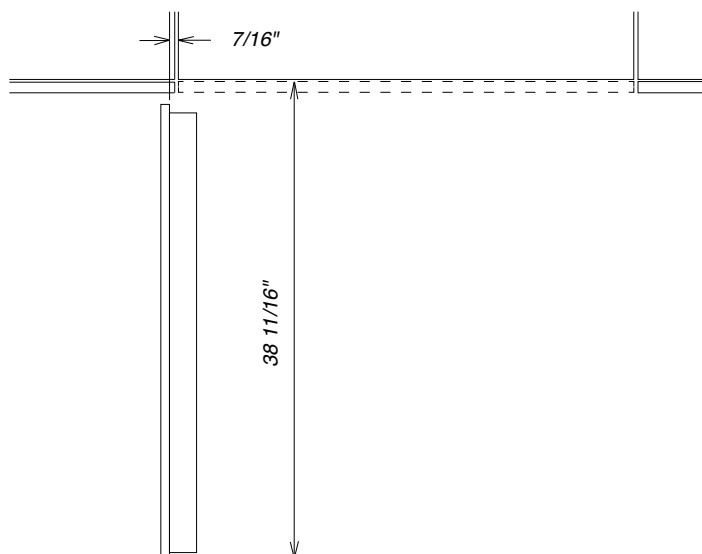


NOTE: Additional space needed depending on the thickness of front panels and handle used.
Freezer units cannot be stop pinned at 90°

115° Door

Thickness options

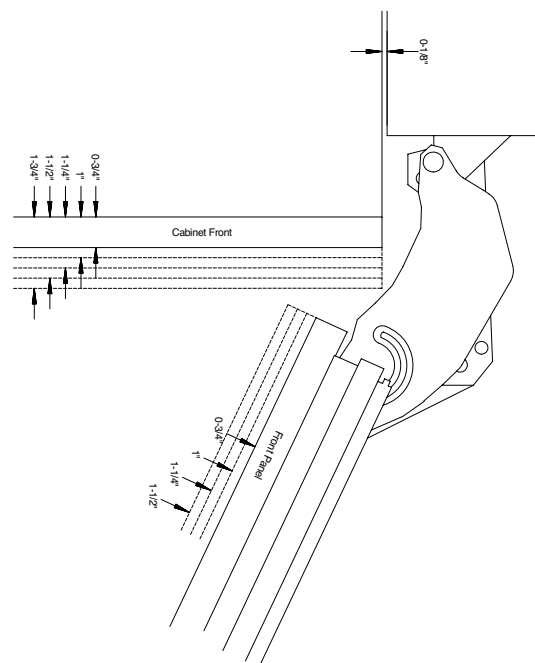

Door Swing

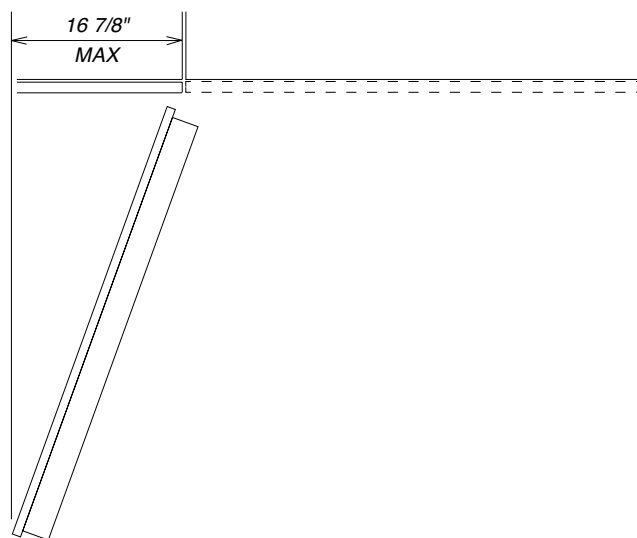

NOTE: Additional space needed depending on the thickness of front panels and handle used.
Freezer units cannot be stop pinned at 90°