

DA 6596 W Puristic Canto

Wall ventilation hood

with energy-efficient LED lighting and backlit controls for easy use.



- Timeless design – 35 3/8 (898) in (mm) wide stainless steel ventilation hood
- Unique convenience – Con@ctivity 2.0
- Powerful – ?? on the booster setting
- Efficient and beautiful – Multi-zone edge extraction
- Variable: edge vented panels made of glass or stainless steel

EAN: 4002515523971 / Material number: 09762220 / Old Material Number: 28659650USA

Construction type	
Wall ventilation hood	•
Operating modes	
Recirculated mode	Convertible
Recirculation conversion kit (order separately)	DUW 20
OdorFree charcoal filter (order separately)	DKF12-900
Decor elements in glass (order separately)	DRP 6590W
Design	
Color	Stainless steel
RAL colours possible as special order	•
Customization possible on request	•
Variable height available as special order	•
Multi-zone edge extraction	•
Control panel	
Electronic controls	•
Power levels (number excl. Intensive)	3
Programmable Intensive switch-off	•
Grease filter saturation indicator	•
Programmable grease filter saturation indicator	•
Programmable charcoal filter saturation indicator	•
Acoustic package	•
User convenience	
Run-on time 5/15 min.	•
Cleaning convenience	
Easy-to-clean canopy interior – CleanCover	•
Filter system	
Number of dishwasher safe stainless-steel grease filters (10-ply)	3
Lighting	
LED ClearView lighting	•
Number x W	3 x 3 W
Light intensity in Lx	460 lx
Color temperature in K	3500 Kelvin
Blower	
Dual-action blower	•
AC motor	•
Extraction	
Air throughput	Values upon request
Safety	
Safety shut-off	•
Technical data	
Canopy width in in.(mm)	35 3/8 (898)
Overall min. height for vented and external in in. (mm)	27 3/8 (693)
Overall max. height for vented and external in in. (mm)	39 7/8 (1010)
Canopy height in in.(mm)	2 7/8 (70)
Overall min. height for recirculation in in. (mm)	32 3/8 (820)
Canopy depth in in.(mm)	19 3/4 (500)
Overall max. height for recirculation in in. (mm)	45 (1143)
Minimum height above electric hobs in mm	24 1/8 (610)

DA 6596 W Puristic Canto

Wall ventilation hood

with energy-efficient LED lighting and backlit controls for easy use.




EAN: 4002515523971 / Material number: 09762220 / Old Material Number: 28659650USA

Minimum height above gas hobs (max. 12.6 kW total power, burner \leq 4.5 kW) in mm	26 (660)
Net weight in lbs. (kg)	56 (25.0)
Length of electrical wire in ft (m)	4 (1.5)
Standard plug fitted	•
Total connected load in kW	0.35
Fuse rating in A	15
Voltage in V	120
Frequency in Hz	60
Number of phases	1
Installation notes	
Vent connection at top	•
Vent connection at top and rear	•
Diameter of vent connection in in. (mm)	6 (150)
Telescopic chimney	•
Accessories supplied	
Reducer from 150 to 125 mm \varnothing	•
Communication module for Con@ctivity XKM 2000 DA	XKS 3000 Z
Optional accessories	
OdorFree charcoal filter	DKF 12-900

DA 6596 W Puristic Canto

Wall ventilation hood

with energy-efficient LED lighting and backlit controls for easy use.

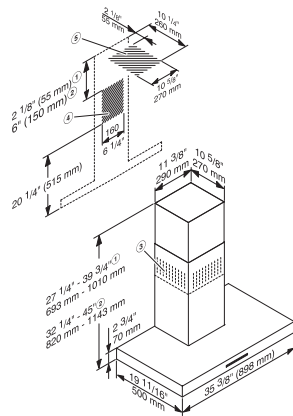

DA 6596 W (Installation drawing) – USA

1) Extraction, 2) Recirculation, 3) Ventilation grille at top for recirculation, 4+5) Installation cut-out (5 not required for recirculation)