

Aria


Undercabinet hood

Specification sheet



Learn
more

MEASUREMENTS

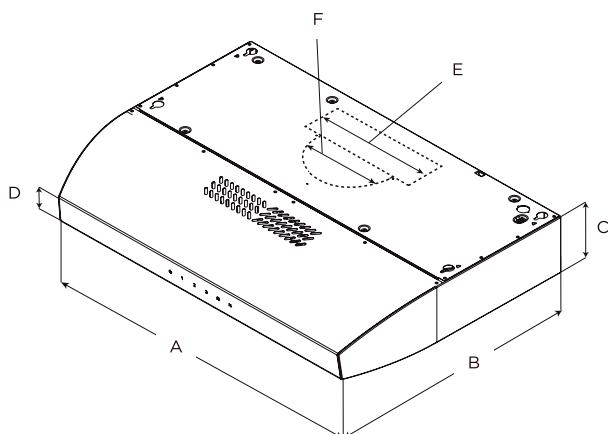

	EAI430SS	EAI436SS
A	30" (76 cm)	36" (91.4 cm)
B	20" (51.2 cm)	
C	4 3/4" (12 cm)	
D	2 1/4" (5.2 cm)	
E	3 1/4" X 10" (8.2 cm x 25.4 cm)	
F	7" (17.8 cm)	

DESCRIPTION

With a compact 4 3/4" height, Aria is an ideal choice for kitchens with limited under-cabinet space. Its upgraded 400 CFM internal blower provides sufficient ventilating power for most kitchens. Aria also offers the luxury and convenience of dimmable LED lighting, along with two Baffle Slot filters and glass touch controls. Available in 30" and 36" widths, Aria is designed for standard ducted installation and can also be used as a recirculating system with the optional kit.



FEATURES

 Semi baffle filter

 Dim light

 Led light

 Touch controls

 CFM reduction system



GENERAL PROPERTIES

Width	30"	36"
Model	EAI430SS	EAI436SS
Dimensions	30"W x 20"D x 4 3/4"H	30"W x 20"D x 4 3/4"H
Blower Type (Internal) ¹	400 CFM (3-speed + boost)	
Noise (Min-max sones) ¹	1.0-5.0 Sones	
Electrical	120V-60Hz, 333W	
Illumination	2 premium dimmable LED, 2.1W, 4000K	
Finish	Stainless Steel with black tempered glass	
Controls	Multi-function Electronic with black glass touch display	
Grease filters	2 stainless steel baffle slot filters	
Installation type	Ducted or recirculating with kit	
Duct transition	3 1/4 x 10" (Top or Rear), or 7" round (sold separately)	

KITS

Recirculating Kit	KIT02178	KIT02179
Backdraft damper	KIT02723 (7" round)	
Duct Transition	KIT02722 (7" round)	

WARRANTY:²

& In-Home Labor by registering on elica.com
Two (2) Years Parts & In-Home Labor. Earn an additional One (1) Year of Parts



The product images shown are for illustration purposes only and may not be an exact representation of the product.
¹ CFM and Noise data indicate the performance of the hood blower tested according to international standards. For AHAM Certified Ratings, established in accordance with California Title 24 Standardized test procedure, please refer to AHAM Certified Product Directory. Electric Ratings are declared according to UL.

² For valid warranty extension, register within 3 months from purchase. For USA & Canada Users Only.