

# MONOGRAM 24" FULLY INTEGRATED PANEL READY DISHWASHER

ZDT800SIYII



## 40 DBA QUIET OPERATION

Harmonizing power and serenity, engineered to deliver flawless cleaning at a quiet 40 dBA in Normal cycle utensils and flatware

## FULL THIRD RACK

The expansive third rack provides the perfect space to clean utensils and flatware

## ADVANCED WASH SYSTEM

Over 70 powerful wash jets, including dedicated flatware and bottle jets, plus a hard food disposer deliver a 360° clean to every corner of the dishwasher

## DUAL DRY SYSTEM

A precise drying system, featuring dual fans and heaters, gently and efficiently dries even the most challenging items, including champagne flutes

## TAILORED WASH CYCLES

Designed for hosting and everyday use, featuring a dedicated Crystal cycle along with specialty options such as PrepRinse™ and Dishwasher Cleaning for added care and convenience

## BRILLIANT SURROUND LED LIGHTING

Illuminates the entire interior for effortless loading and unloading

## INTUITIVE NAVIGATION

Glass touch controls and a brilliant LCD screen elevate the everyday chore into an effortless ritual

## WIFI CONNECTED WITH SMARTHQ™

Protect and enhance your appliance with remote access, ongoing updates and alerts

## COMPATIBLE WITH MONOGRAM HANDLES

Elevate your dishwasher's look by selecting a Statement (ZXADH1STYSS) or Minimalist (ZXADH1MNYSS) Collection handle or one of our Designer Collection handles in Brass (ZXADTH1PVB1) or Titanium (ZXADTH1PVT1), SOLD SEPERATELY



**SPECIFICATIONS**

|                         |  |
|-------------------------|--|
| Cutout Height           | 34 1/2" (87.6 cm) Min; 35" (88.9 cm) Max |
| Minimum Cabinet Width   | 24" (61.0 cm)                            |
| Minimum Cabinet Depth   | 24" (61.0 cm)                            |
| Door Clearance          | 25 1/2" (with door open)                 |
| Electrical Requirements | 1.2 A                                    |
| Volt/Hertz/Amps         | 120 V, 60 Hz, 15 or 20 amp circuit       |
| Capacity                | 16 Place Settings                        |
| Unit Width              | 23 3/4"                                  |
| Unit Height             | 33 3/4" - 34 5/8"                        |
| Unit Depth              | 24" (including 3/4" panel)               |
| Panel Depth             | 3/4"                                     |
| Panel Max. Weight       | 20 lbs                                   |

**ATTENTION ELECTRICIAN:**

A 115 volt 60Hz, 15 or 20 amp power supply is required. An individual properly grounded branch circuit or circuit breaker is recommended. Install a properly grounded 3-prong electrical receptacle recessed into the back wall.


**Unit comes with power cord attached.**

NOTE: Always refer to installation guide for complete installation instructions


For more details, refer to the installation instructions for this product on [Monogram.com](http://Monogram.com). Dimensions in parentheses are in centimeters unless otherwise noted.

For questions about your appliance, please call 1-800-626-2000.


**INSTALLATION CUTOUT FRONT VIEW**

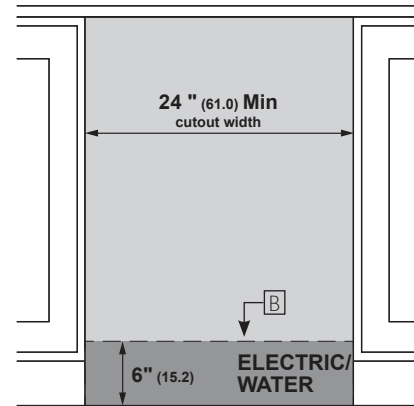

**FLUSH INSTALLATION CUTOUT SIDE VIEW**

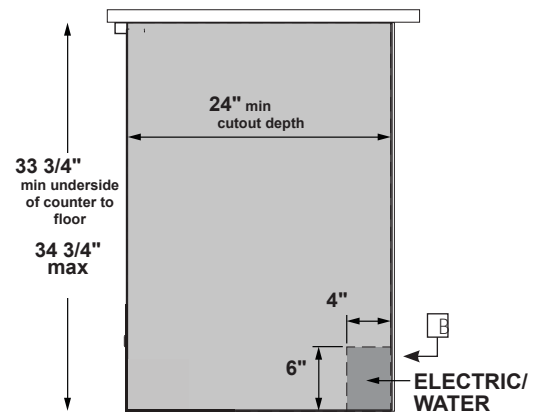

**CUSTOM PANEL (RECOMMENDED DEPTH 3/4")**

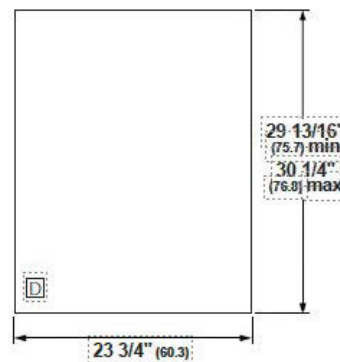

Max Recommended Weight with Handle: 20 lbs

Custom panels on previous Monogram dishwasher models are compatible

- A** The dishwasher drain hose must be no more than 12 feet in length for proper drainage.
- B** Electrical connections are at the right front of the dishwasher and water connections are on the left. The hot water line should extend forward 30" to 40" from the rear wall. The electrical must extend forward at least 24" to reach the junction box.
- C** To prevent siphoning, an air gap or high drain loop must be used.